

8

7

6

5

4

3

2

1

F



E

D

C


B

A

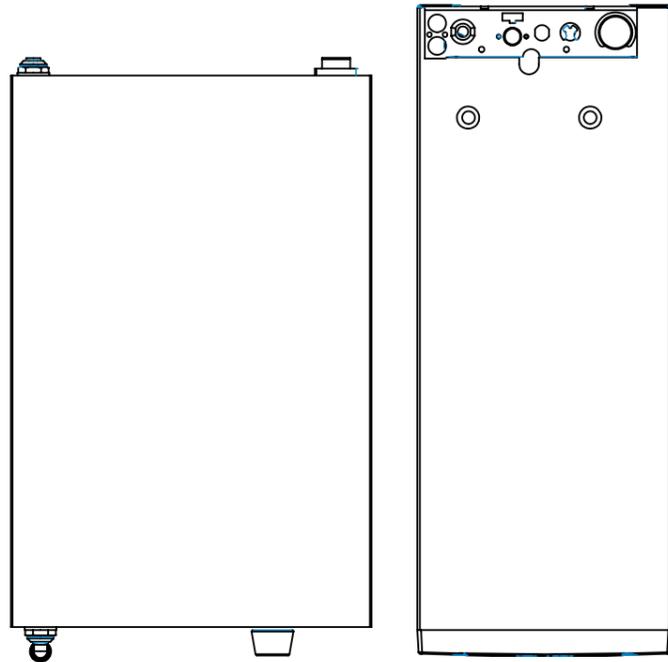



CO2 CANISTER

COLD AND SPARKLING UNIT

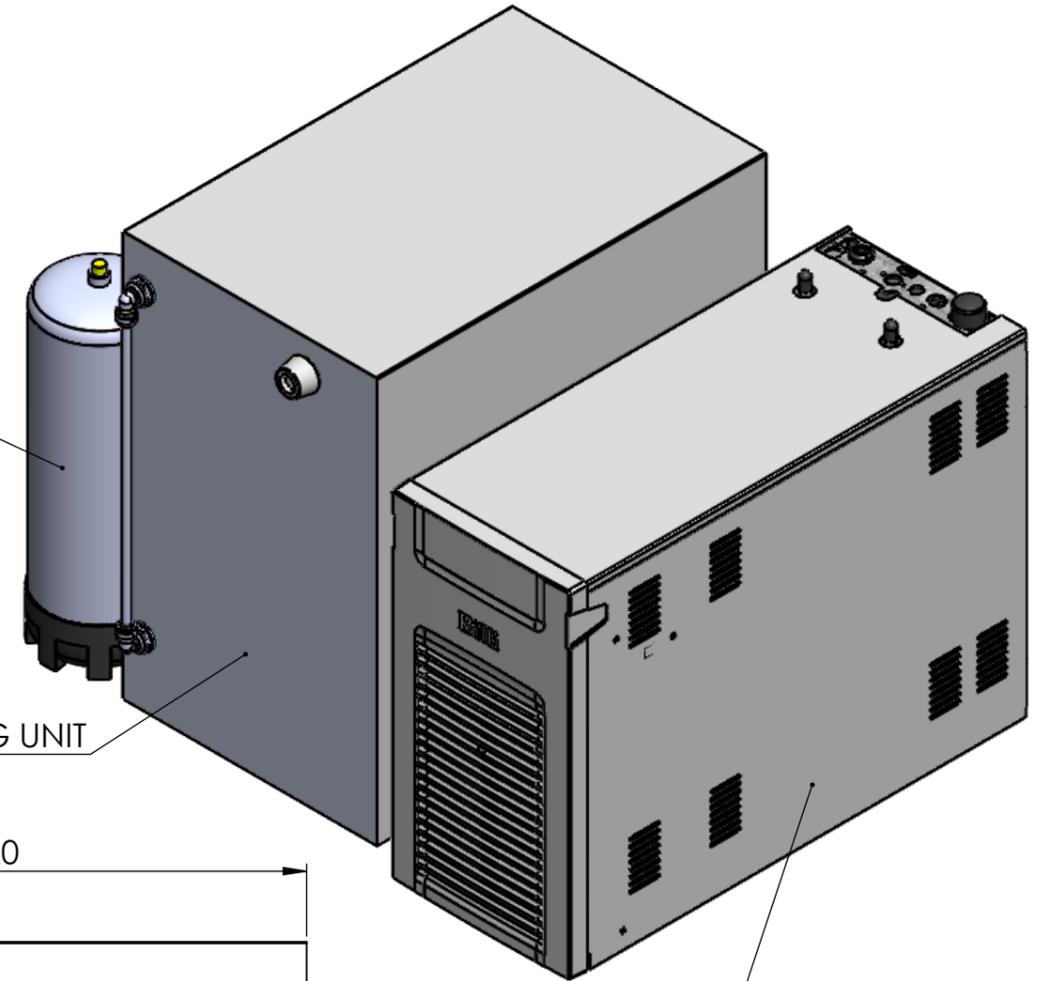

BOILING UNIT

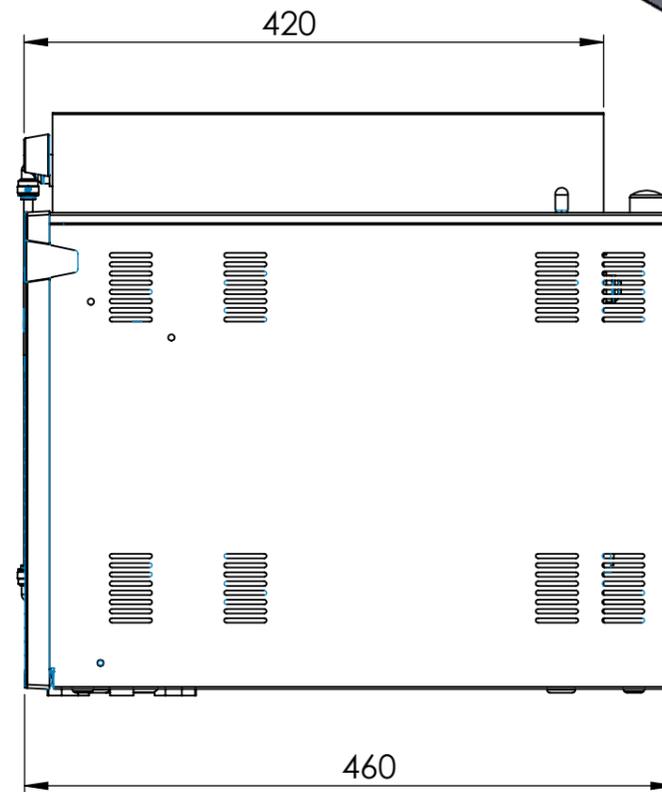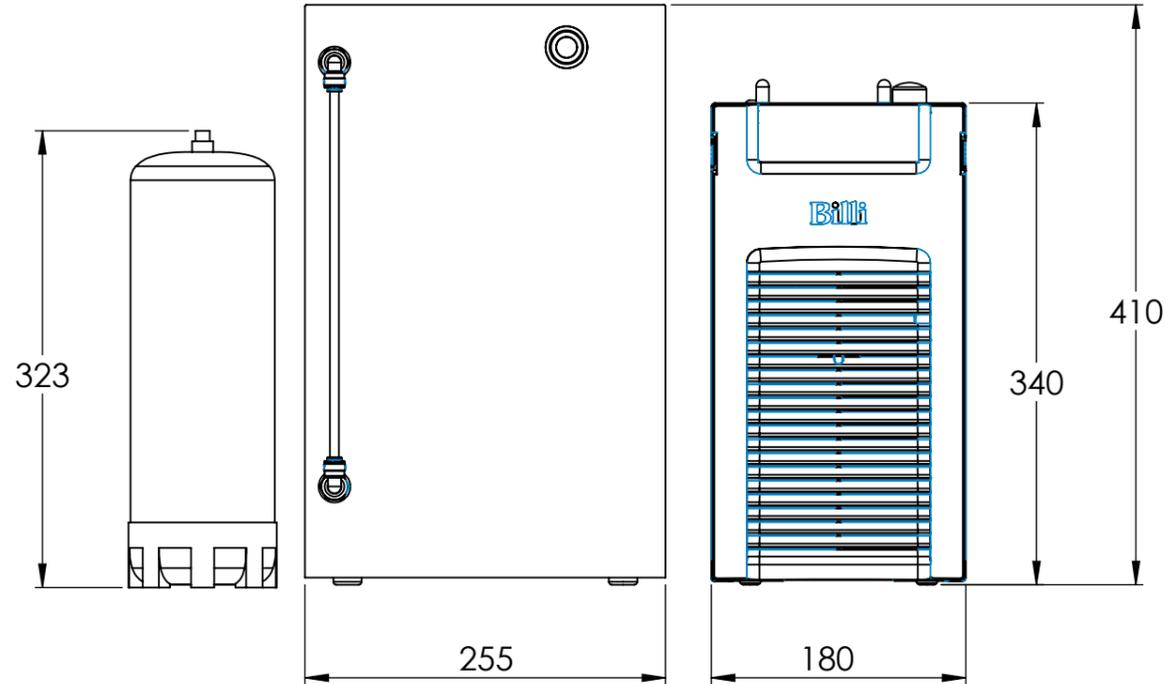

NOTES:

1. INLET WATER SUPPLY PRESSURE TO BE BETWEEN 250-1000Kpa.
2. DO NOT INSTALL WITH WATER SUPPLY THAT IS MICROBIOLOGICALLY UNSAFE OR OF UNKNOWN WATER QUALITY WITHOUT ADEQUATE DISINFECTION BEFORE THE SYSTEM.
3. SEE INSTALLATION GUIDE FOR INSTALLATION CLEARANCE AND VENTILATION REQUIREMENTS.
4. A 1/2" BSP STOP TAP MUST BE INSTALLED WITHIN 450mm OF UNIT.
5. BOILING UNIT MUST BE INSTALLED IN THE ORIENTATION SHOWN WITH CONNECTIONS FACING UP.
6. SEE INSTALLATION GUIDE FOR POWER REQUIREMENTS AND SETUP INFORMATION.

Bili BILLI AUSTRALIA PTY LTD
 42 Lucknow Crescent, Thomastown,
 Victoria, 3074, Australia
 P: +61 (0)3 9469-0400 | F: +61(0)3 9469-0499

TITLE
QUADRA SPARKLING

UNLESS OTHERWISE SPECIFIED:
 THIRD ANGLE
 DIMENSIONS ARE IN mm

DWG NO.	REV.
	01A
SHEET SIZE	SHEET SCALE
A3	1:5